

SIEMENS



Dedicated for the chemical industry

SITRANS F M MAG 3100 P:

The electromagnetic flowmeter solution with devoted features.

Process Instrumentation

[siemens.com/flow](https://www.siemens.com/flow)

The best choice for the chemical industry



The robust SITRANS F M MAG 3100 P is designed to meet the most challenging requirements and applications within the chemical industry. Choose the reliable Siemens solution offering pre-configuration, comprehensive diagnostics and outstanding service, worldwide.

Select a reliable partner

- Proven reliability with more than 35 years of experience in the flow market
- Short lead time and easy ordering
- Offering complete solutions (known as Totally Integrated Automation)

Maximum safety and reliability

- ATEX and FM/CSA approvals
- Reliable and flexible communication via HART, Profibus and Foundation Fieldbus
- Reliability as the SENSORPROM stores data automatically as a "fingerprint"

Worldwide service and support

- Represented in more than 190 countries and available 24 hours a day, 365 days a year
- Extensive knowledge within the chemical business team
- Dedicated training available on demand

The perfect fit



Siemens flowmeters have a robust design satisfying the unique requirements for flowmeters in the chemical industry



Rely on Siemens as your partner

The chemical industry is characterized by high application demands and tough conditions, including:

- Hazardous areas
- Harsh ambient conditions
- Aggressive acids and bases
- Abrasive materials
- Varying media conditions

With conditions like this, you need a partner who knows your business, and can offer the best solutions for your application. Through constant innovations, we offer reliable and profitable solutions for all your process automation tasks – whether that is a single measurement application or a complete system solution.

Designed and pre-configured for chemical applications

SITRANS F M MAG 3100 P is standardized and designed to cover the majority of chemical applications and conditions:



- Hazardous areas
- Strict safety standards
- High temperatures
- High pressure
- Acids and lyes
- Abrasive resistance
- Namur compliance (NE21, NE131)




For additional applications in the chemical industry SITRANS F M MAG 3100 family offers a variety of configurations.

SITRANS F M MAG 3100 family



MAG 3100 P	MAG 3100 HT	MAG 3100
Short lead time	Temperatures above 150 °C (266 °F)	Flexible product program

The optimized and dedicated solution

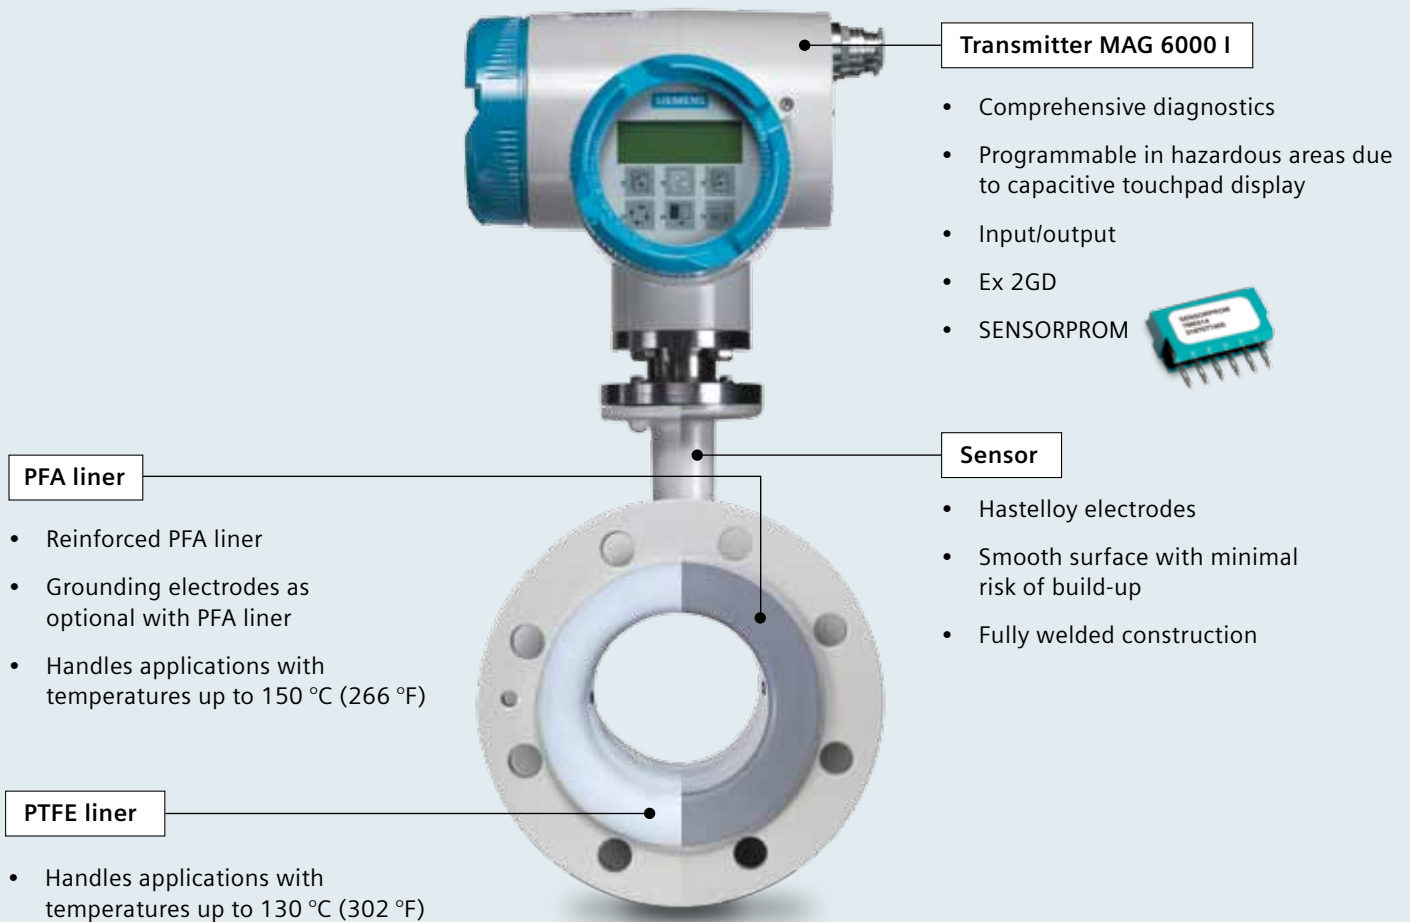

Comprehensive diagnostics

The diagnostic function offers comprehensive identification in easily readable text (including self-check, error messages and status logs).

Grounding electrodes

Siemens can provide Hastelloy grounding electrodes on PFA liners saving money, minimizing installation time and lowering risk of failure due to maintenance.

Robust design

Siemens flowmeters offer a robust design that lasts in harsh and abrasive environments, guaranteeing a long service life and low cost of ownership.

Enhanced reliability with SENSORPROM

The unique SENSORPROM memory unit features the highest level of safety and reliability with factory preprogramming and automatic storage function. This ensures fast and easy transmitter replacement without loss of data, reduced accuracy or downtime.

Industry-optimized liners

Siemens offers both PTFE and PFA liners for high temperatures and with high chemical resistance in a full range of sizes. PTFE is the right choice for applications without the risk of vacuum, and with temperatures up to 130 °C (302 °F). The PFA liner has a reinforced stainless steel tube which makes it perform extremely well under vacuum conditions and during temperature fluctuations up to 150 °C (266 °F)

Modular platform with flexible selection

Different flowmeter options are available to suit any application, guaranteeing the perfect fit. A wide variety of communication modules and approvals are also available.

Products for hazardous area, Zone 1 and Div 1 (ATEX, FM, CSA)



3100P/MAG 6000 I (Ex de)



MAG 6000 I (Ex de)

MAG 3100 P

Approvals
IEC: Ex de [ia] T3-6

ATEX: 2GD EEx de [ia] T3-6

FM: Class I, Div1 (compact)

CSA/FM: Class I, Zone 1

Products for hazardous area, Zone 2, Div 2 (ATEX, FM, CSA)



MAG 3100 P (PFA+PTFE)



MAG 5000/MAG 6000



MAG 6000 I

Approvals
FM: Class I, Div 2

CSA: Class I, Div 2



SITRANS F M MAG 3100 P with SITRANS F M MAG 6000 I		
Liner	PFA	PTFE
Medium temperature	-20 to 150 °C (-4 to 266 °F) ¹⁾	-20 to 130 °C (-4 to 302 °F)
Nominal sizes	15 to 150 mm / 1/2" to 6"	15 to 300 mm / 1" to 12"
Accuracy	0.2% ± 1 mm/s	
Power supply	24 V DC, 115 to 230 V AC, 18 to 30 V AC	
Operating pressure	PN 10/ PN 16/ PN 40/ ANSI 150	
Ambient temperature	From -20 to 60 °C (-4 to 140 °F)	
Enclosure rating	IP67 (NEMA 4X)	
Electrode	Hastelloy C22 ²⁾	
Grounding electrode	Optional	N/A

¹⁾ Temperature above 150 °C (266 °F) available with the MAG 3100H T

²⁾ Tantalum and platinum liners available with the MAG 3100 family

SITRANS F M MAG 3100 P

A proven solution with high chemical resistance, ideal for the tough, challenging applications of the chemical industry

Get more information:

Find everything about Flow Instruments:
www.siemens.com/flow

Explore the unique range of the Process Instrumentation portfolio:
www.siemens.com/processinstrumentation

Learn more about Process Automation:
www.siemens.com/processautomation

Siemens A/S
Flow Instruments
DK-6430 NORDBORG

Headquarter:
Siemens A/S
DK-2750 BALLERUP

Subject to change without prior notice
Order No.: E20001-A430-P730-X-7600
DISPO 27900
WS 091102.0
Printed in Denmark
© Siemens AG 2011

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.